




Series
PBLT2
&
PBLTX

Submersible Level Transmitter

Perfect for Sludge and Slurries, Lightning Protected, Intrinsically Safe



Level

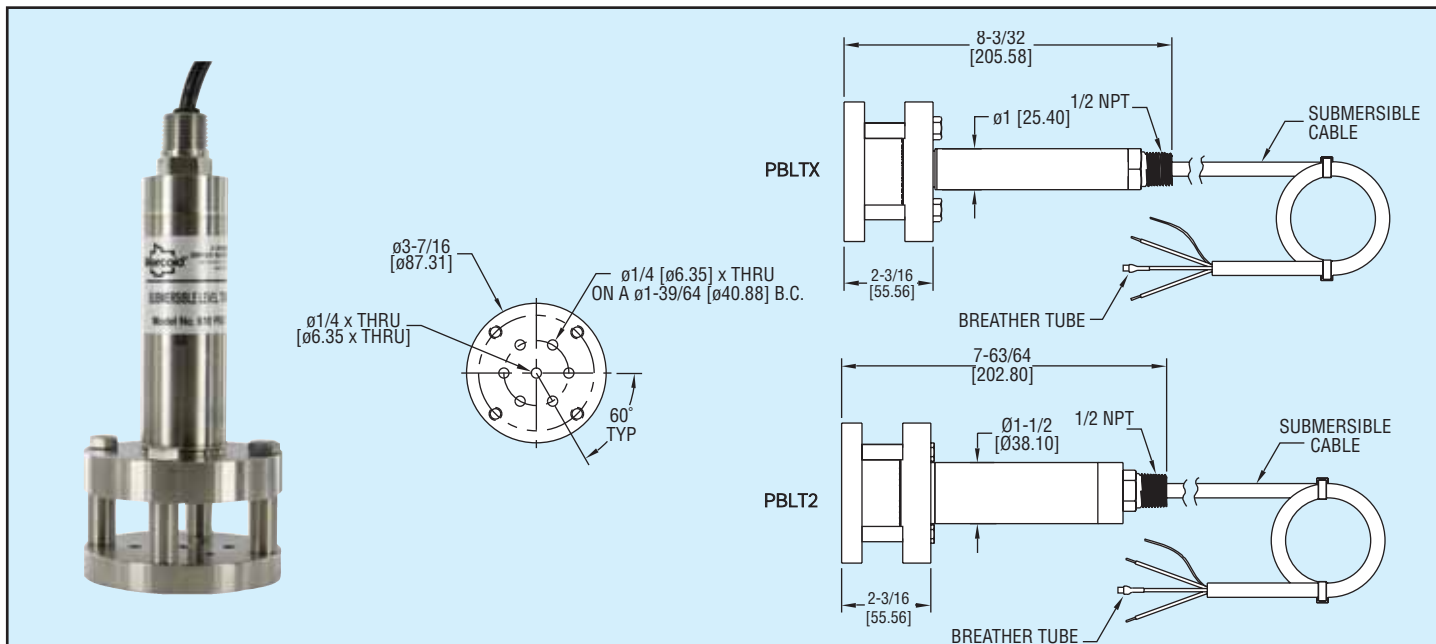

PBLT2 and PBLTX Submersible Level Transmitters are manufactured for years of trouble free service in the harshest applications. Both measure the height of liquid above the position in the tank referenced to atmospheric pressure. The transmitter consists of a piezoresistive sensing element, encased in a 316 SS housing. Perfect for wastewater and slurry applications with features to protect the unit from these demanding applications. Large diameter 316 SS diaphragm seal is non-clogging and damage resistant to floating solids.

The PBLT2 incorporates lightning and surge protection utilizing dual arrestor technology, grounded to case, eliminating both power supply surges and lightning ground strike transients (surge protection is not guaranteed and is not covered by warranty). The PBLTX is UL approved intrinsically safe for use in hazardous locations when used with proper barrier.

Units comes equipped with a 270-pound tensile strength shielded and vented cable. Ventilation tube in the cable automatically compensates for changes in atmospheric pressure above the tank. The vent is protected with a maintenance free filter eliminating particulate or water droplets from entering the transducer.

FEATURES

- Excellent chemical compatibility with 316 construction and ETFE cable
- Lightning and surge protection on PBLT2 models
- Maintenance free vent filter
- UL approved intrinsically safe on PBLTX models
- Large diameter, non-clogging, damage resistant, 316 SS diaphragm seal

SPECIFICATIONS

Service: Compatible liquids.

Wetted Materials: 316 SS, 316L SS, Buna-N, cable: ETFE or polyurethane.

Accuracy: $\pm 0.25\%$ full scale (includes linearity, hysteresis, and repeatability).

Temperature Limit: PBLT2: 0 to 200°F (-18 to 93°C), PBLTX: 0 to 176°F (-18 to 80°C).

Compensated Temperature Range: PBLT2: 0 to 180°F (-18 to 82°C), PBLTX: 0 to 176°F (-18 to 80°C).

Thermal Effect: $\pm 0.02\%$ FS/°F.

Pressure Limit: 2X full scale.

Power Requirement: PBLT2: 13 to 30 VDC, PBLTX: 10 to 28 VDC.

Output Signal: 4 to 20 mA DC, two wire.

Response Time: 50 msec.

Loop Resistance: 900 ohms.

Electrical Connection: Wire pigtail.

Mounting Orientation: Suspended in tank below level being measured.

Weight: 4.3 lb (2.0 kg).

Electrical Protection: PBLT2: Lightning and surge protection, PBLTX: none.

Agency Approvals: PBLT2: None, PBLTX: CE, UL intrinsically safe for Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III, Div. 1. (According to control drawing 01-700797-00)

APPLICATIONS

- Wastewater: sludge pits, clarifiers, digesters; alum tanks; chemical storage tanks; oil tanks; lime slurry; slumps; reservoirs.

OPTIONS

Intrinsically Safe Approval- Change model number from PBLT2 to PBLTX

Custom ranges or Cable Lengths- Contact the factory for pricing.

ACCESSORIES

MTL5041, intrinsically safe galvanic isolator

MTL7706, intrinsically safe zener barrier

Model Number	Range psi (ft wc) [m wc]	Cable Length ft (m)	Cable Type
PBLT2-5-40	5 (11.54) [3.52]	40 (12.2)	ETFE
PBLT2-10-40	10 (23.09) [7.04]	40 (12.2)	ETFE
PBLT2-15-60	15 (34.63) [10.56]	60 (18.3)	ETFE
PBLT2-20-60	20 (46.18) [14.08]	60 (18.3)	ETFE
PBLT2-5-40-PU	5 (11.54) [3.52]	40 (12.2)	Polyurethane
PBLT2-10-40-PU	10 (23.09) [7.04]	40 (12.2)	Polyurethane
PBLT2-15-60-PU	15 (34.63) [10.56]	60 (18.3)	Polyurethane
PBLT2-20-60-PU	20 (46.18) [14.08]	60 (18.3)	Polyurethane